


TLT

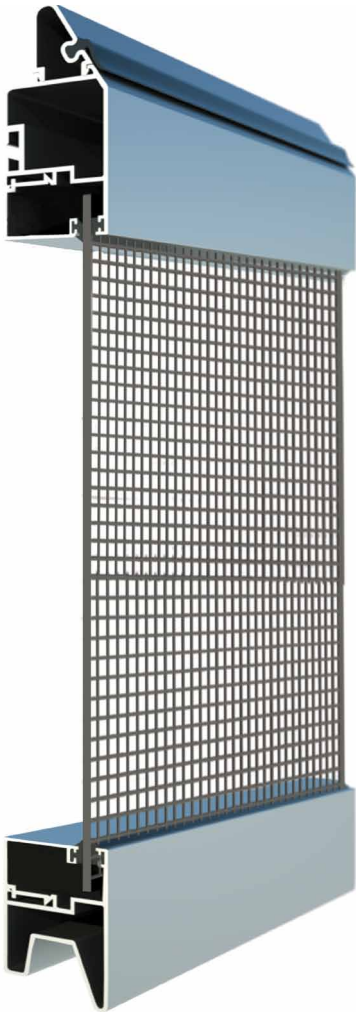

TLT sectional doors are designed for premises that require intensive ventilation, such as underground garages and car parks. Alu-frame with perforated, galvanized and coated steel sheets provides required air flow.

We offer grilles with 2 size holes: 5x5 with approx. 40% air permeability, and 10x10 with approx. 70% air permeability.

The number of perforated panels, both in the door and side doors, could vary depending on the air flow requirements.

